DOT 14



Type Suspension

Materials Body: brass

Sphere: milk glass (G50)

Hardware: brass

Total Height Height to be specified upon order

Weight (min.) A min. 6 lb / 2.7 kg

B min. 6 lb / 2.7 kg C min. 7 lb / 3.2 kg

Light Bulb A LED (included), 20x 3.5W

B LED (included), 12x 3.5W C LED (included), 20x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models

Certifications Certification Certifications Certifications Certification Certification


Notes • Must be installed by an electrician

Additional charges for modifications

• Lead time between 7-9 weeks


Dimensions are approximate and may vary slightly




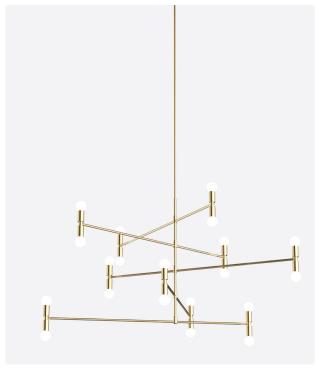



С


Updated: December 2018

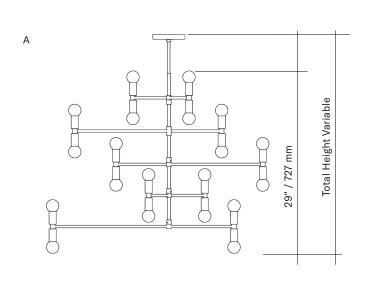




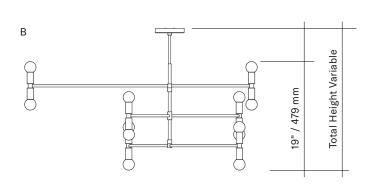




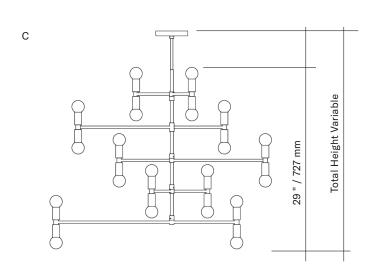



Order Guide: SKU

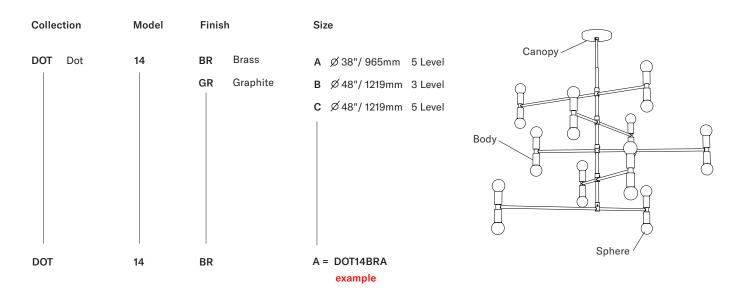

Finish



Canopy

Swivel option for slanted ceiling



Light Bulb & Dimmer Specifications



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.